

Ultra-efficient lenses, combined with our unique materials and powerful next generation LEDs, make this P2-rated lamp an ideal, high-performance, high value lighting solution. **See www.TecNiqInc.com for complete details and a complete list of part numbers.**

S30

2" Round Low-Profile Sidemarker




Technical features

- ✦ Grommet mounted industry standard size
- ✦ Exceeds FMVSS 108 standards
- ✦ Durable impact resistant lens
- ✦ IP68 Rated for dust and water proof with hermetic seal
- ✦ TecSeal Urethane Potting material guarantees circuit boards
- ✦ Standard non-polarized connector

Specifications

Dimensions:	2" x 0.72" (see diagram)
LED's:	1
Current:	0.06A-0.08A Colored lens 0.04A-0.07A Clear Lens
Connector:	PL2 - Non Polarized Connector
Mounting:	Grommet mounted into standard holes
Voltage:	9 - 14V DC
LED Colors:	Red & Amber

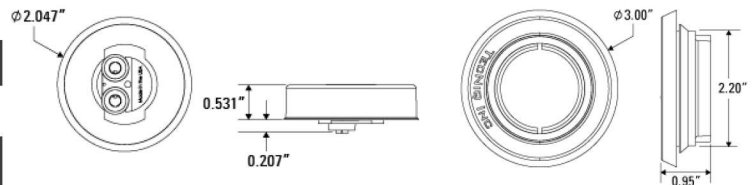

California Proposition 65

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm.

Part Numbers	Description	Std. Pack	Connector
S30-AA00-1	2" Round Amber Sidemarker Amber Lens	125	Fem 2 Pole
S30-AA0P-1	2" Round Amber Sidemarker Amber Lens w/ Pigtail	125	Pigtail
S30-RR00-1	2" Round Red Sidemarker Red Lens	125	Fem 2 Pole
S30-RC0P-1	2" Round Red Sidemarker Clear Lens w/ Pigtail	125	Pigtail