
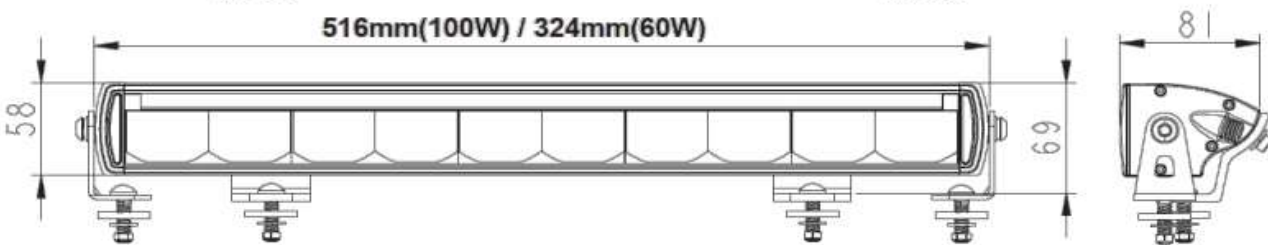


ARENCO

TITAN-20BAR

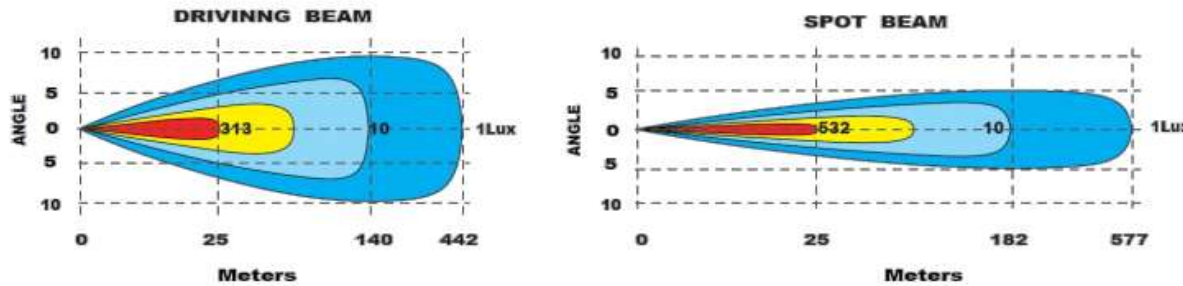

Materials:

- 10pcs*10W CREE LED
- Color Temperature: 6500K
- 6063 extruded Aluminum Heat-Sink
- Efficient Polycarbonate(PC) Reflector
- Lexan Polycarbonate(PC) Front Cover
- Anodized Polyester Powdercoat
- SIDE&BOTTOM BRACKET

Features:

- Driving Beam +Park Light
- Soft & Integrated Park Light
- Anti Rust / Corrosion / Freezing Resistance
- Electronic Thermal Management (ETM)
- Side-Reflecting Optic System
- ECE R112/R7/ R10, CE
- Over / Under Voltage Protection
- Reverse Polarity Protection
- UV Resistant, ShockResistant
- Comply with IP68
- 50,000+ Hr LED Lifespan

Part NO.	LEDs	Dimensions (mm)	Beam pattern	AMP Draw (12V/24V/)	Luminous Flux (lm)	Peak Beam Intensity(cd)	Operating conditions:
TITAN-20BAR	10X10W	516*58*81	Spot Beam	6.5A / 3.25A	Raw lumen:9500LM	332500	· Voltage: DC9-36V · Environment temperature -40~+60 ° C
			Driving Beam (Ref. No.: 45)		Effective lumen:8075LM	195625	